

PROLINE

7/29/08

www.prolineracing.com



1:10 TRUCK

APPLICATION CHART 2008



Tires

Part #	Description	Compounds
		Fun ● M2 ■ M3 ▲ R3
1041-00	Masher	◆
1043-00	Dirt Paw	◆
1045-00	Trac-Ta-Gator	◆
1047-00	Speed Paw	◆
1050-00	Striker II	◆
1052-00	Sand Paw	◆
1060-00	Road Hawg II	●
1062-00	Road Rage II	●
1070-00	Dirt Hawg II	●
1072-00	Dirt Works	●
1074-00/02	Masher 2000	● ■
1080-00	Speed Hawg II	◆
1120-00/02	MOAB	● ■
1144-00/02	Badlands	●
1145-01/02	Hammer	●
1146-01/02	Flat Iron	●
8095-01/02/12	Edge (Front)	● ▲
8097-02	Step Pin T	●
8170-01/02	Gladiator II	● ■
8192-02/12	Hole Shot T	● ▲
8195-02	Blade (Front)	●
8196-01/02	Bow-Tie T	● ■
8200-02	LugNut T	●
8201-02	Snake Eyes	■
30 Series (with use of 30 Series Wheels)		
1136-00	Dirt Hawg	●
1137-00	Road Rage	●
1138-00	Bow-Tie	●
1143-00	Badlands	●

Wheels

Part #	Description	Associated RC10 GT	Associated RC10 GT2	Associated RC10 T4	Duratrax Evader ST	Duratrax Nitro Evader ST	Losi Speed T	Losi XXX-MT	Losi XXX-T	TRAXXAS® JATO	TRAXXAS® Electric RUSTLER®	TRAXXAS® Nitro RUSTLER®	TRAXXAS® Electric STAMPEDE®	TRAXXAS® Nitro STAMPEDE®	XTM X-Cellerator
2635-00/02	Velocity Dish (Front)														
2636-00/02	Velocity Dish (Rear)														
2685-01	Agitator (Front)														
2686-01	Agitator (Rear)														
2689-01/12/22/32	Wabash 30 Series Chrome w/ adaptors														
30 Series															
2693-12/22/32/42	Wabash 30 Series Chrome w/ adaptors														
2694-01	Torque 30 Series Chrome (Front)														
2695-01	Torque 30 Series Chrome (Rear)														

Accessories

Part #	Description	Associated RC10 GT	Associated RC10 GT2	Associated RC10 T4	Duratrax Evader ST	Duratrax Nitro Evader ST	Losi Speed T	Losi XXX-MT	Losi XXX-T	TRAXXAS® JATO	TRAXXAS® Electric RUSTLER®	TRAXXAS® Nitro RUSTLER®	TRAXXAS® Electric STAMPEDE®	TRAXXAS® Nitro STAMPEDE®	XTM X-Cellerator
2689-11	Associated Adaptor														
2689-21	Losi/XTM Adaptor														
2689-31	TRAXXAS® Nitro Adaptor														
2689-41	TRAXXAS® Electric Adaptor														



Track Conditions	Hard Packed / Blue Groove	Hard Packed / Light Dust	Medium Packed / Moist	Medium Packed / Loamy	Loamy	Clay	All-Terrain	Asphalt	Sand
1041-00									
1043-00									
1045-00									
1047-00									
1050-00									
1052-00									
1060-00									
1062-00									
1070-00									
1072-00									
1074-00/02									
1080-00									
1120-00/02									
1144-00/02									
1145-01/02									
1146-01/02									
8095-01/02/12									
8097-02									
8170-01/02									
8192-02/12									
8195-02									
8196-01/02									
8200-02									
8201-02									
30 Series									
1136-00									
1137-00									
1138-00									
1143-00									


Gluing Instructions

1:10 Wheel Prep

Chrome Removal Instructions
 • For best tire mounting results, remove chrome finish from the lip of wheel. Use 100 grit sand paper or remove carefully by scraping off with a sharp hobby knife.

1:10 Tire Gluing Instructions

- (1) Clean bead of tire with alcohol for best adhesion.
- (2) Place wheel into tire and pull tire beads into place. Wrap a thick rubber band around the tire close to the edge of the bead to be glued to hold tire against wheel.
- (3) Pull back this bead of tire so that the inner bead is exposed (see figure below). Place a drop of glue on wheel and set the tire back. Repeat process around wheel until entire bead has been glued. Once the inner bead is glued, gently pull back the outer bead of tire. Place any needed glue on exposed areas and let dry.
- Repeat step 2 & 3 on other side of the tire.

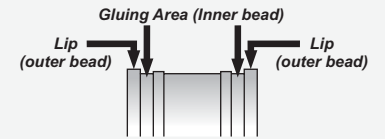

Attention All-Purpose wheel owners:
 It is important that you do not over tighten the wheel adaptor screws when mounting.

Tire Care & Tips

- To ensure the full life of your foam inserts, do not expose to any type of moisture. Moisture will cause the foam to breakdown and tear in most cases. Vent both wheels and tires to allow dirt to escape. To do this use a leather punch or scissors and cut two diamond shaped holes on opposite ends of the tire.
- When running on loamy or soft conditions, rotate tires front to back for optimum performance.
- When running on hard-packed, blue-groove type conditions, do not rotate tires as a sharp edge on this type of surface tends to cause a skating type sensation.
- For extended rubber freshness, store tires out of sunlight and in a sealable sandwich bag.
- For bearing longevity and optimum track performance, a balanced tire is recommended, just as in full-scale racing. To do this, we recommend using some type of R/C Propeller balancer and modeling clay. Balance once the tire is mounted and glued.

TREAD PATTERN RESPONSE



1137-00 Road Rage



2695-01 Torque 30 Series Chrome (Rear)

